



PXP - 100 CA

Most powerful compact portable X - ray



- High-performance capacitor for stable and reliable power supply
- Constant X - ray output without influence of line power fluctuation
- Equipped with new remote control functions
- Flat touch panel, digital display, LED display reverse
- 750 pre-set technique slots (PROM memory)
- Automatic line voltage compensation

Specifications

Model		PXP 100 CA
Output	Tube vol./current	110 kV/100 mA
	Voltage range	40-110 kV, 1 kV step
	mAs range	0.1-200 mAs, 40 steps
	Max. output	5.0 kW@75 kV
X-ray tube	Application	CEI OX 110-15
	Focal spot	1.8 mm
	HU capacity	76 kHU
	Cooling rate	57 kW/s
Collimator	Min. light field	5 cm x 5 cm@1 m SID
	Max. light field	35 cm x 35 cm@65 cm SID
	Lamp	40 watt halogen lamp
	Auto timer	30 sec
	SID scale lenght	2 m
	Laser pointer	None
Power	Input	100-240 VAC (Free-Voltage)
	Frequency/phase	50/60 Hz, single phase
	Voltage compensation	± 10 %
Control Panel		7-segment LED read-out reversible, Hand switch remote control function Digital LED display: mAs & KV Remote control software & PROM Programmable pre-set technique Data storage & store button LED indicator: ready & exp. wait
Weight		19.6 kg
Dimensions (WxHxL)		254 x 225 x 423
Special features		750 APR

Optional Accessories

PXMS-2010



- Easy handling by gas spring technology
- Max. height of 210 cm

- Folding and easy to transport




Standard Accessory

Carrying Case



Dimensions (mm)

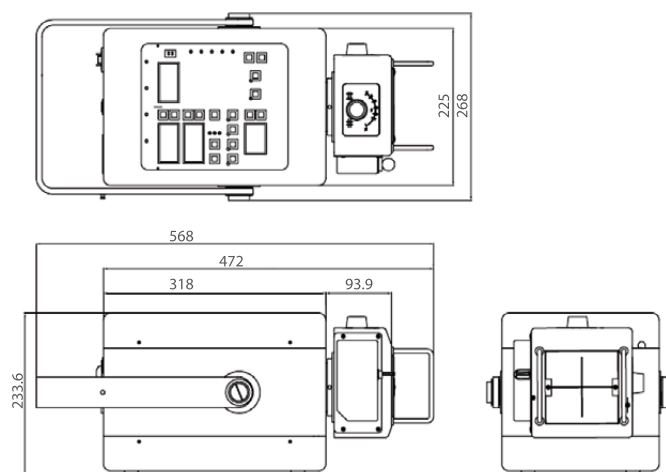

medical **ECONET**
GERMANY

Mainstr. 6 c-d, 45768 Marl-Germany

t: +49 (0) 2365 924 37-0 info@medical-econet.com
f: +49 (0) 2365 924 37-55 www.medical-econet.com

CE 0123

Dealer

*Changes and errors without notice.